

(4x2x24 AWF FTP Cat. 5e + 2x14 AWG + RG-59 B/U) Control Cable HYBRID & COMPOSITE CABLES P/N 9840212104

TELECOM

Applications

Indoor, audio applications




Outer Jacket Material
UV resistant FR-PVC



Outer diameter
15.0 mm nom.



Weight
230 kg/km

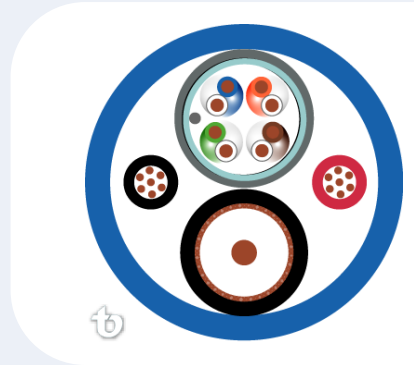

General Construction

The cable contains:

2 - 14 AWG PVC insulated conductors

1 - [6330592101](#) RG-59 B/U 75Ω coaxial cable

1 - [8371204129](#) 4x2x24 AWG Cat. 5e data cable

All components are cabled together with filling elements and jacketed .

Design & Materials

Detailed Construction

20 AWG Wires :

Conductor: Stranded bare copper, 7x0.61 mm, 14 AWG

Insulation: PVC, 3.45 mm nom

Color: Black, Red

DC Resistance: 9.4 Ω/Km max. @ 20°C

Dielectric Strength: 2000 Volts/1 minute between conductors

Voltage Rating: 600 Volts rms

Outer Jacket Thickness (mm nom)	1.2
Outer Jacket Color	Blue
Marking	Per request

Performance

Min. Operating Temperature (°C)	-20
Max. Operating Temperature (°C)	+70
UV Resistance	Yes

Standards

Flammability Rating

IEC 60332-1

UL 1581 VW-1

Applicable Standards

RoHS 3 2015/863/EU



Teldor Cables & Systems Ltd. ("Teldor") reserves the right to make changes to the products described in this catalog without prior notice. Teldor does not assume any liability which may occur due to the use of the products described herein. Drawings may not be to scale and are provided for general and informational purposes only. The information contained in this catalog is the proprietary property of Teldor, and may not be used, reproduced or disclosed to others, in whole or in part, without the written authorization of Teldor.

Version 1.3 | Last update: 2013-10-13